


Your XE-21X 2x1 UXGA Switcher

Congratulations on purchasing your **XE-21X**, which is intended for any presentation system requiring simple two-way switching where a passive “hard-wired” signal path is preferred. Your **XE-21X** is a mechanical, passive **2x1 UXGA Switcher** for computer graphics video signals (VGA to UXGA and higher). The **XE-21X** switches either of two signals to a single output (2 inputs, 1 output). It can also be used a 1x2 switcher (1 input, 2 outputs).

Connecting the XE-21X 2x1 UXGA Switcher

To setup your **XE-21X**, connect:

1. Up to two computer graphics sources (for example, computers) to the input HD15F connectors.
2. The output HD15F connector to an acceptor (for example, a display).

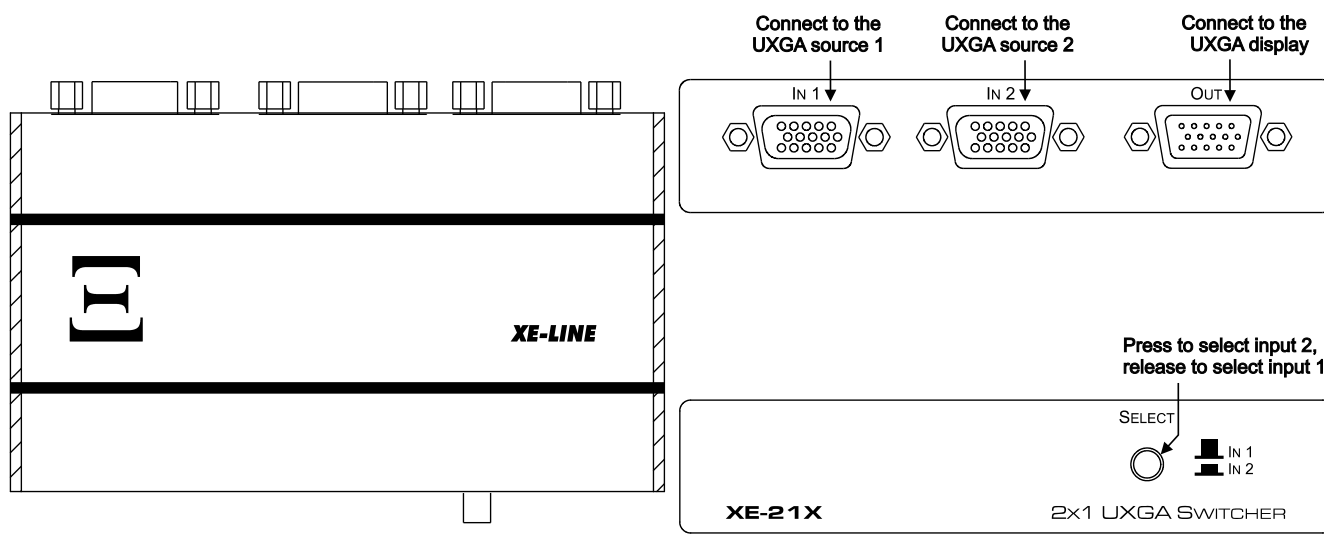

Note:

Use good quality connection cables to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables) and position your product away from moisture, excessive sunlight and dust.



Caution – No operator-serviceable parts inside unit.

For assistance, contact your dealer. Product Warranty is for one year.

